

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 424 920 A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 90120425.5

(51) Int. Cl.⁵: H04N 1/40


(22) Date of filing: 24.10.90

(23) Priority: 25.10.89 JP 277396/89

(43) Date of publication of application:
02.05.91 Bulletin 91/18(84) Designated Contracting States:
DE FR GB(71) Applicant: Dainippon Screen Mfg. Co., Ltd.
1-1, Tenjinkitamachi Teranouchi-Agaru
4-chome Horikawa-Dori
Kamikyo-ku Kyoto 602(JP)(72) Inventor: Kishida, Yoshihiro, Dainippon
Screen Mfg. Co. Ltd.
1-1, Tenjinkitamachi, Teranouchi-Agaru
4-chome
Horikawa Dori, Kamikyo-ku, Kyoto(JP)(74) Representative: Goddar, Heinz J., Dr. et al
FORRESTER & BOEHMERT
Widenmayerstrasse 4/I
W-8000 München 22(DE)

(54) Method of and apparatus for obtaining tone curve.

(57) A plurality of reference tone curves are previously determined. An operator divides an original image into image regions and selects respective reference tone curves ($f_1(x)$, $f_2(x)$) for the image regions. The operator designates weight values for the respective reference tone curves. A weighted average of the respective reference tone values is calculated with the weight values to obtain a tone curve employed for converting the gradation of the original image.

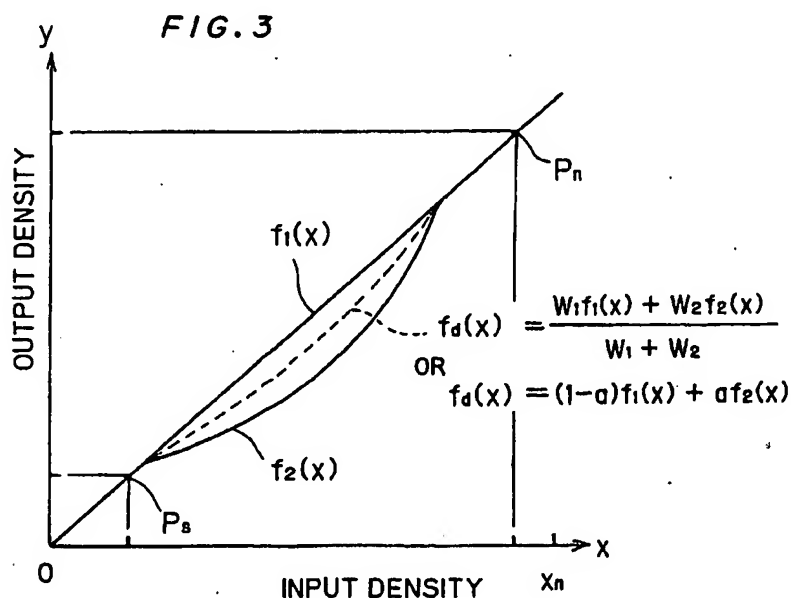

Xerox Copy Centre

EP 0 424 920 A2

METHOD OF AND APPARATUS FOR OBTAINING TONE CURVE

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to a method of and an apparatus for obtaining a tone curve or a tone conversion curve used for executing tone conversion of image data which are obtained by reading an original image.

Description of Prior Art

10 In an image processor such as a color scanner, tone conversion is conducted on image data which are obtained by reading an original image by photoelectric scanning thereof, thereby a recorded image having required tone expression being obtained. For such tone conversion, it is not preferable to employ a fixed tone curve but to employ a tone curve in accordance with the characteristic of the original image to be processed. However, for producing an appropriate tone curve for each original, the structure of the image processor is liable to become complicated to some extent.

15 Efforts have been made to develop a technique for obtaining tone conversion or gradation conversion tables in accordance with the characteristics of each original with a simple structure. For example, in the technique disclosed in Japanese Patent Application Laid-Open No. 63-42575 (1988), a required tone curve is obtained by combining a tone curve determined according to a density histogram of the whole image and a reference tone curve prepared in advance at an arbitrary combination ratio.

20 However, for particularly appropriate expression of the tone of a partial region in the original image, the tone curve produced by the aforesaid technique is sometimes inadequate. When the color tone of the partial image region whose tone is desired to be expressed appropriately is widely different from the color tone of the whole image, the tone expression of the partial image region might not meet the requirement, because the tone curve is obtained according to the density histogram of the whole image in the aforesaid technique.

SUMMARY OF THE INVENTION

25 The present invention is directed to a method of obtaining a tone curve employable for converting a gradation of an image.

30 According to the present invention, the method comprises the steps of: (a) obtaining a plurality of reference tone curves for a plurality of gradation characters, respectively; (b) designating a plurality of image regions on the original image; (c) selecting respective reference tone curves for the image regions designated among the plurality of reference tone curves; (d) designating weight values for the respective reference tone curves; and (e) combining the respective reference tone curves in cooperation with the weight values to thereby obtain the tone curve.

35 The weight values may be arbitrarily designated, or alternately, they may be determined on the basis of the ratio between respective areas of the plurality of image regions. The plurality of image regions can be designated by moving a cursor on the image displayed.

40 Preferably, the plurality of reference tone curves are prepared for various types of objects appearing on images. The designation of respective reference tone curves for the plurality of image regions may be attained by selecting the types of objects appearing on the image.

45 In an aspect of the present invention, the respective tone curves for the plurality of image regions are obtained on the basis of the statistical distributions of density on the plurality of image regions.

50 The present invention also provides an apparatus employable for conducting the present method.

Since the tone curve for converting the gradation of the image is obtained by combining reference tone curves assigned to respective image regions with each other, the reference tone curve for a selected image region can be reflected to the tone curve at a desired weight.

Accordingly, an object of the present invention is to provide a method of and an apparatus for obtaining a tone curve suitable for expressing the gradation of a selected image region more appropriately than other

image regions.

These and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF DRAWINGS

Fig. 1 is a schematic structural diagram showing a scanner system according to a preferred embodiment of the present invention;

Fig. 2 is a flow chart showing the procedure of the preferred embodiment;

Fig. 3 shows an example of tone curves;

Fig. 4 shows an example of a menu table;

Fig. 5 shows an example of an original image;

Fig. 6 is a schematic structural diagram showing a scanner according to another preferred embodiment of the present invention;

Fig. 7 is a flow chart showing the procedure of the preferred embodiment of Fig. 6; and

Fig. 8 is a flow chart showing the procedure according to still another preferred embodiment of the present invention.

DESCRIPTION OF PREFERRED EMBODIMENTS

A. Schematic Structure of System

Fig. 1 is a schematic structural diagram of a color scanner system according to a preferred embodiment of the present invention. In Fig. 1, an input scanner 1 scans an original to read an image thereof and supplies an image signal V_1 to an image processing circuit 2. The image processing circuit 2 comprises a color computation lookup table 21 for executing color computation by which BGR components of the image signal V_1 are converted into YMCK components, a gradation lookup table (hereinafter referred to as a gradation LUT) 22 for executing tone conversion, and the like. An image signal V_2 obtained by the image processing circuit 2 is supplied to a dot generator or a halftone dot signal generating circuit 3 to be converted into a halftone dot signal V_{dot} therein. The halftone dot signal V_{dot} is supplied from the dot generator 3 to an output scanner 4, which exposes a photosensitive film based on this signal and records each color-separated image thereon.

The scanner system further comprises a tone curve setting device 5 for setting an appropriate tone curve in accordance with the character of the original image. The tone curve setting device 5 comprises a CPU 51, a console 52 which is connected to the CPU 51 and has a keyboard 52a and a CRT 52b, and two memories 54 and 55 connected to the CPU 51 by way of a CPU bus 53. Data can be transmitted between the CPU 51 and a floppy disc 56 by way of the CPU bus 53. The tone curve which is obtained by the tone curve setting device 5 is supplied in the form of a lookup table by way of the CPU bus 53 to the gradation LUT 22 to be stored therein.

B. Operation of the System

Fig. 2 is a flow chart showing the procedure according to the preferred embodiment of the present invention.

In the process step S1, a plurality of reference tone curves for different tone characteristics are prepared and stored in the floppy disc 56.

Fig. 3 shows an example of the reference tone curves. In Fig. 3, the abscissa indicates an input density (or a density before the tone conversion) x and the ordinate indicates an output density (or a density after the tone conversion) y . Two reference tone curves $f_1(x)$ and $f_2(x)$ are shown in Fig. 3.

The tone curves are in general adjustable to form various shapes between a shadow point P_s and a highlight point P_h , which shapes express tone reproduction characteristics. As reference tone curves, prepared are a plurality of curves in accordance with various tone characteristics of the images having different image pictures (portraits, machines, landscapes, etc.) and different tones (high keys, low keys, etc.).

(B) In the process step S2, an operator observes the original image on which the tone conversion is to be conducted, and thereby specifies a plurality of reference tone curves f_i to be employed for setting the tone curve appropriate to the original image and the values of weights W_i for these reference tone curves, respectively. Fig. 4 shows an example of a menu table MT employed for specifying the reference tone curves to be employed. In the menu table MT, items for different image pictures (portraits, machines, landscapes, etc.) and different tones (high keys, low keys, etc.) are arranged. The menu table is displayed, for example, on the CRT 52b. The operator moves a cursor to select a plurality of items corresponding to the contents of the original image, to thereby select the reference tone curves f_i in accordance with the tone characteristics of the items being selected. The weights W_i for the respective reference tone curves are inputted by means of the keyboard 52a. *weight*

(C) Fig. 5 shows an example of the original image. For simplification, the original image is supposed to be separable into two: a background image region R_1 and a main subject image region R_2 which is located in the background region R_1 and has weak gradation. The regions R_1 and R_2 may be designated by tracing the boundary between them with a cursor on the CRT 52b. A first reference tone curve $f_1(x)$ suited to the background region R_1 and a second reference tone curve $f_2(x)$ suited to the main subject region R_2 are supposed to be selected. The data indicating the reference tone curves $f_1(x)$ and $f_2(x)$ are read out from the floppy disc 56 to be stored in the memories 54 and 55 respectively. The weights W_1 and W_2 for the reference tone curves $f_1(x)$ and $f_2(x)$ are designated by the operator through the console 52.

(D) In the process step S3, the CPU 51 calculates the tone curve $f_d(x)$ appropriate to the original image according to the following equation:

$$f_d(x) = \{W_1 f_1(x) + W_2 f_2(x)\} / (W_1 + W_2) \quad (1) \text{ where } 0 \leq x \leq x_n, \quad x_n \text{ designating the maximum value of the input density.}$$

Instead of designating the weights W_1 and W_2 in the process step S2, one tone curve (for example, $f_1(x)$) to which processing priority is given between two reference tone curves $f_1(x)$ and $f_2(x)$ and the weight $W_2 = a$ for the other tone curve $f_2(x)$ may be designated. In this case, the tone curve $f_d(x)$ appropriate to the original image is calculated according to the following equation instead of Equation (1): $f_d(x) = (1-a)f_1(x) + af_2(x)$ (2) where $0 < a < 1$. *claw (3)*
claw (7) correction

In Fig. 3, the tone curve $f_d(x)$ calculated according to Equation (1) or (2) is shown by a broken line. The tone curve $f_d(x)$ is an average of the first and second reference tone curves $f_1(x)$ and $f_2(x)$ weighted with the respective weights W_1 and W_2 , as is understood from Equation (1). By varying the values of the weights W_1 and W_2 , the tone curve $f_d(x)$ having the tone expression characteristic approximate to either the first or second reference tone curve $f_1(x)$ or $f_2(x)$ can be obtained. For example, in the case of expressing the tone of the background region R_1 more appropriately than the main objective region R_2 , the weight W_1 for the first reference tone curve $f_1(x)$ is set to a large value and the weight W_2 or a for the second reference tone curve $f_2(x)$ is set to a small value.

The first and second reference tone curves $f_1(x)$ and $f_2(x)$ may be different for each color component Y, M, C and K to calculate the appropriate tone curve $f_d(x)$ for each color component.

After the tone curve $f_d(x)$ which expresses the tone of a partial image region in the original is calculated by the CPU 51, data of the tone curve $f_d(x)$ is supplied from the CPU 51 to the gradation LUT 22 to be stored therein in the form of a lookup table.

(F) In the process step S4, the original is set to the input scanner 1 to read the image thereof. The image signal V_1 is processed by the image processing circuit 2 and the dot generator 3, and color-separated halftone dot images for Y, M, C and K are recorded on the photosensitive film by the output scanner 4. At this time, the tone conversion is conducted through the tone curve $f_d(x)$ stored in the gradation LUT 22, whereby the color-separated images having the required tone characteristic is obtained.

The process may be modified such that the image obtained through the tone conversion is displayed on a monitor display and the operator changes the choice of the reference tone curves and the weights while observing the image displayed.

50

6. Other Preferred Embodiments

(A) Fig. 6 is a schematic structural diagram of a color scanner system according another preferred embodiment of the present invention. The scanner system comprises a signal converter 6, a frame memory 7 and a color monitor 8 in addition to the elements of the scanner system in Fig. 1. The signal converter 6 converts the image signal V_2 outputted from the image processing circuit 2 into luminance data I_d for each pixel. The luminance data I_d are stored in the frame memory 7 and, as required, are supplied from the frame memory 7 to the color monitor 8 to display the original image on the color monitor 8.

Fig. 7 is a flow chart showing the procedure of the preferred embodiment using the scanner system of Fig. 6. In Fig. 7, the process steps S1, S3 and S4 are similar to those of Fig. 2. Instead of the process step S2 of Fig. 2, the process steps S21 through S23 are executed.

(A) In the process step S21, the input scanner 1 reads the original image, and the color monitor 8 displays the original image.

(B) *discriminatory* In the process step S22, the operator specifies the positions and sizes of the image regions R₁ and R₂ in the original image. For example, the operator specifies the center position of the image region R₂ while moving the cursor on the screen of the color monitor 8 by means of a mouse and the like, and specifies the radius value of the image region R₂ by means of a keyboard and the like. As a result, the inside of the circle defined by the specified center position and radius is specified as the image region R₂. Alternatively, the image region R₂ may be specified by tracing the contour line of the image region R₂ by means of a stylus pen and the like. The CPU 51 calculates the ratio A₂:A₁ of the area A₂ of the image region R₂ thus specified to the area A₁ of the background region R₁, and the weights W₁ and W₂ in Equation (1) or the weight a in Equation (2) are determined such that the equality W₂:W₁ = A₂:A₁ or 1:a = A₂:A₁ holds. Alternatively, the ratio A₂:(A₁ + A₂) of the area A₂ of the image region R₂ to the area (A₁ + A₂) of the whole original image may be used for determining the weights W₁ and W₂ (or a).

In the process step S23, the reference tone curves f_i appropriate to the respective regions in the original are selected. The selection is executed in the same manner as the selection of the reference tone curves in the process step S2 of Fig. 2.

20 If the weights W_i (or a) are determined according to the area ratio of the image regions R₁ and R₂ in the original image, as described above, even an unskilled operator can obtain the tone curve f_d(x) appropriate to the original easily. Besides, the operator may change the weights W₁ and W₂ to appropriate values easily while observing the monitor image.

Fig. 8 is a flow chart showing the procedure of still another preferred embodiment using the scanner system of Fig. 6. In the procedure, the process steps S1 and S23 for preparing the reference tone curves in Fig. 6 are absent. Instead the process step S24 is inserted between the process steps S22 and S3.

In the process step S24, the CPU 51 produces each density histogram for the image regions R₁ and R₂ in the original image and produces the reference tone curves f₁(x) and f₂(x) appropriate to the image regions R₁ and R₂ respectively based on the density histograms. A method of finding the density histograms and the tone curves f₁(x) and f₂(x) based on the density histograms are disclosed, for example, in United States Patent No. 4,792,979, which disclosure is incorporated herein. In the process step S3, based on the tone curves f₁(x) and f₂(x) thus found, a tone curve f_d(x) appropriate to the whole original image is found according to Equation (1) or (2).

35 As disclosed in United States Patent No. 4,792,979, the reference tone curves f₁(x) and f₂(x) may be found based on other statistical values representing the density distribution state of the original image than the density histogram.

According to the procedure of Fig. 8, there is no need for preparation of a large number of reference tone curves in advance. The reference tone curves appropriate to the respective image regions in the original image are not required to be selected by the operator, but are produced automatically. Therefore, 40 an appropriate tone curve can be obtained independently of the operator's ability.

The present invention is applicable not only to a color scanner but also to a monochrome scanner.

In the above-mentioned preferred embodiments, the original image is divided into two image regions R₁ and R₂.

(C) However, the original image may be divided into three image regions or more. In general, when the original image is separated into m-number of image regions, where m is an integer larger than one, the tone curve f_d(x) is calculated by means of the following equation instead of Equation (1):

(D)
$$f_d(x) = \frac{\sum_{i=1}^m W_i f_i(x)}{\left(\sum_{i=1}^m W_i \right)} \quad \dots (3)$$

Furthermore, the tone curve may be obtained by taking the whole image of the original as one image region and taking a specified portion included therein, e.g., the main subject portion, as another image region. When the whole image to be processed is divided into three image regions or more, for example, the weight of the background region may be set to zero.

D. Conclusion

As described above, according to the present invention, an image is divided into a plurality of image regions, and reference tone curves appropriate to the respective image regions are determined and averaged with weights. When the tone of a partial image region is desired to be expressed particularly appropriately, a curve approximate to the reference tone curve suited to the partial image region is employed as a tone curve of the whole image. Therefore, the tone curve suitable for appropriately reproducing the tone of the partial region designated in the original image can be obtained easily.

Although the present invention has been described and illustrated in detail, it is clearly understood that the same is by way of illustration and example only and is not to be taken by way of limitation. The spirit and scope of the present invention should be limited only by the terms of the appended claims.

The features disclosed in the foregoing description, in the claims and/or in the accompanying drawings may, both, separately and in any combination thereof, be material for realising the invention in diverse forms thereof.

Claims

1. A method of obtaining a tone curve ($f_d(x)$) employable for converting gradation of an original image, characterised by the steps of:
 - (a) obtaining (S1) a plurality of reference tone curves ($f(x)$) for a plurality of respective gradation characters;
 - (b) designating (S2 or S22) a plurality of image regions (R_1, R_2) on said original image;
 - (c) selecting (S2 or S23) respective reference tone curves ($f_1(x), f_2(x)$) for said image regions (R_1, R_2) designated among said plurality of reference tone curves ($f(x)$);
 - (d) designating (S2 or S22) weight values (W_1, W_2) for said respective reference tone curves ($f_1(x), f_2(x)$); and
 - (e) combining (S3) said respective reference tone curves ($f_1(x), f_2(x)$) in cooperation with said weight values (W_1, W_2) to thereby obtain said tone curve ($f_d(x)$).
2. The method of claim 1, wherein the step (a) comprises the step of:
 - (a-1) obtaining said plurality of reference tone curves ($f(x)$) for gradation characters of reference images (MT) each having different picture and different tone.
3. The method of claim 2, wherein the step (c) comprises the steps of:
 - (c-1) providing a menu table (MT) representing each said different picture and each said different tone;
 - (c-2) selecting a picture and a tone in said menu table (MT) for each of said plurality of image regions (R_1, R_2); and
 - (c-3) extracting a reference tone curve corresponding to said picture and said tone from said plurality of reference tone curves ($f(x)$) for each of said plurality of image regions (R_1, R_2) to thereby obtain said respective reference tone curves ($f_1(x), f_2(x)$).
4. The method of any one of claims 1 to 3, wherein the step (b) comprises the step of:
 - (b-1) dividing said original image into said plurality of image regions (R_1, R_2).
5. The method of claim 4, wherein the step (b-1) comprises the steps of:
 - (b-1-1) displaying said original image on display means (52b); and
 - (b-1-2) defining boundaries between said plurality of image regions (R_1, R_2) on said displayed original image.
6. The method of claim 5, wherein the step (b-1-2) comprises the step of: tracing said boundaries with cursor means.
7. The method of claim 6, wherein the step (b-1-2) comprises the steps of:
 - designating a center position of an image region (R_2) on said displayed original image;
 - designating a size of said image region (R_2); and
 - obtaining one of said plurality of image regions (R_1, R_2) as said image region (R_2) having said center position and said size.
8. The method of any preceding claim, wherein the step (d) comprises the steps of:
 - (d-1) selecting one image region (R_1) among said plurality of image regions (R_1, R_2);
 - (d-2) providing a first weight value (W_1) to said selected one image region (R_1); and
 - (d-3) providing second weight values (W_2) to image regions (R_2) not selected, where said first weight value (W_1) is larger than said second weight values (W_2).
9. The method of any one of claims 1 to 7, wherein the step (d) comprises the steps of:

- (d-1) obtaining the ratio between respective areas (A_1 , A_2) of said plurality of image regions (R_1 , R_2); and
 (d-2) determining said weight values (W_1 , W_2) such that the ratio between said weight values (W_1 , W_2) is equal to said ratio between said respective areas (A_1 , A_2).
10. A method of obtaining a tone curve ($f_d(x)$) employable for converting gradation of an original image, characterised by the steps of:
- (a) designating (S22) a plurality of image regions (R_1 , R_2) on said original image;
 - (b) determining (S24) respective statistical distributions of density on said plurality of image regions (R_1 , R_2);
 - (c) obtaining (S24) respective reference tone curves ($f_1(x)$, $f_2(x)$) for said plurality of image regions (R_1 , R_2) as a function of said respective statistical distributions;
 - (d) designating (S22) weight values (W_1 , W_2) for said respective reference tone curves ($f_1(x)$, $f_2(x)$); and
 - (e) combining (S3) said respective reference tone curves ($f_1(x)$, $f_2(x)$) in cooperation with said weight values (W_1 , W_2) to thereby obtain said tone curve ($f_d(x)$).
11. The method of claim 10, wherein the step (b) comprises the step of:
- (b-1) obtaining respective density histograms on said plurality of image regions (R_1 , R_2).
12. The method of claim 10 or 11, wherein the step (a) comprises the step of:
- (a-1) dividing said original image into said plurality of image regions (R_1 , R_2).
13. The method of claim 12, wherein the step (a-1) comprises the steps of:
- (a-1-1) displaying said original image on display means (52b); and
 - (a-1-2) defining boundaries between said plurality of image regions (R_1 , R_2) on said displayed original image.
14. The method of claim 13, wherein the step (a-1-2) comprises the step of: tracing said boundaries with cursor means.
15. The method of claim 14, wherein the step (a-1-2) comprises the steps of:
- designating a center position of an image region (R_2) on said displayed original image;
 - designating a size of said image region (R_2); and
 - obtaining one of said plurality of image regions (R_1 , R_2) as said image region (R_2) having said center position and said size.
16. The method of any one of claims 10 to 15, wherein the step (d) comprises the steps of:
- (d-1) selecting one image region (R_1) among said plurality of image regions (R_1 , R_2);
 - (d-2) providing a first weight value (W_1) to said selected one image region (R_1); and
 - (d-3) providing second weight values (W_2) to image regions (R_2) not selected, where said first weight value (W_1) is larger than said second weight value (W_2).
17. The method of any one of claims 10 to 15, wherein the step (d) comprises the steps of:
- (d-1) obtaining the ratio between respective areas (A_1 - A_2) of said plurality of image regions (R_1 , R_2); and
 - (d-2) determining said weight values (W_1 , W_2) such that the ratio between said weight values (W_1 , W_2) is equal to said ratio between said respective areas (A_1 , A_2).
18. An apparatus for obtaining a tone curve $f_d(X)$ employable for converting gradation of an original image, characterised by:
- (a) means (56) for storing data with respect to a plurality of reference tone curves ($f(x)$) which are obtained for a plurality of respective gradation characters;
 - (b) means (52b) for displaying said original image;
 - (c) means (52) for designating a plurality of image regions (R_1 , R_2) on said displayed original image;
 - (d) means (51, 54, 55) for selecting respective reference tone curves ($f_1(x)$, $f_2(x)$) for said plurality of image regions (R_1 , R_2) among said plurality of reference tone curves ($f_1(x)$);
 - (e) means (52) for obtaining weight values (W_1 , W_2) for said respective reference tone curves ($f_1(x)$, $f_2(x)$); and
 - (f) means (51) for obtaining a weighted average of data with respect to said respective reference tone curves ($f_1(x)$, $f_2(x)$) in cooperation with said weight values (W_1 , W_2) to thereby obtain said tone curve.
19. The apparatus of claim 18, wherein the means (c) comprises:
- (c-1) means (52) for dividing said original image into said plurality of image regions (R_1 , R_2).
20. The apparatus of claim 18 or 19, wherein the means (e) comprises:
- (e-1) means (52a) for designating said weight values.
21. The apparatus of claim 18 or 19, wherein the means (e) comprises:
- (e-1) means (52, 51) for obtaining the ratio between respective areas (A_1 , A_2) of said plurality of image regions (R_1 , R_2); and
 - (e-2) means (52a, 51) for determining said weight values (W_1 , W_2) such that the ratio between said weight values (W_1 , W_2) is equal to said ratio between said respective areas (A_1 , A_2).

22. An apparatus for obtaining a tone curve ($f_d(x)$) employable for converting gradation of an original image, characterised by:

(a) means (52b) for displaying said original image;

(b) means (52) for designating a plurality of image regions on said original image displayed;

5 (c) means (51) for determining respective statistical distributions of density on said plurality of image regions;

(d) means (51, 54, 55, 56) for obtaining data with respect to respective reference tone curves ($f_1(x)$, $f_2(x)$) for said plurality of image regions (R_1 , R_2) as a function of said respective statistical distributions;

10 (e) means (51, 52) for obtaining weight values (W_1 , W_2) for said respective reference tone curves ($f_1(x)$, $f_2(x)$); and

(f) means (51) for obtaining a weighted average of said data in cooperation with said weight values (W_1 , W_2) to thereby obtain said tone curve ($f_d(x)$).

23. The apparatus of claim 22, wherein the means (b) comprises:

(b-1) means (52) for dividing said original image into said plurality of image regions (R_1 , R_2).

15 24. The apparatus of claim 22 or 23, wherein the means (e) comprises:

(e-1) means (52a) for designating said weight values.

25. The apparatus of claim 22 or 23, wherein the means (e) comprises:

(e-1) means (52) for obtaining the ratio between respective areas (A_1 , A_2) of said plurality of image regions (R_1 , R_2); and

20 (e-2) means (51) for determining said weight values (W_1 , W_2) such that a ratio between said weight values (W_1 , W_2) is equal to said ratio between said respective areas (A_1 , A_2).

25

30

35

40

45

50

55

FIG. 1

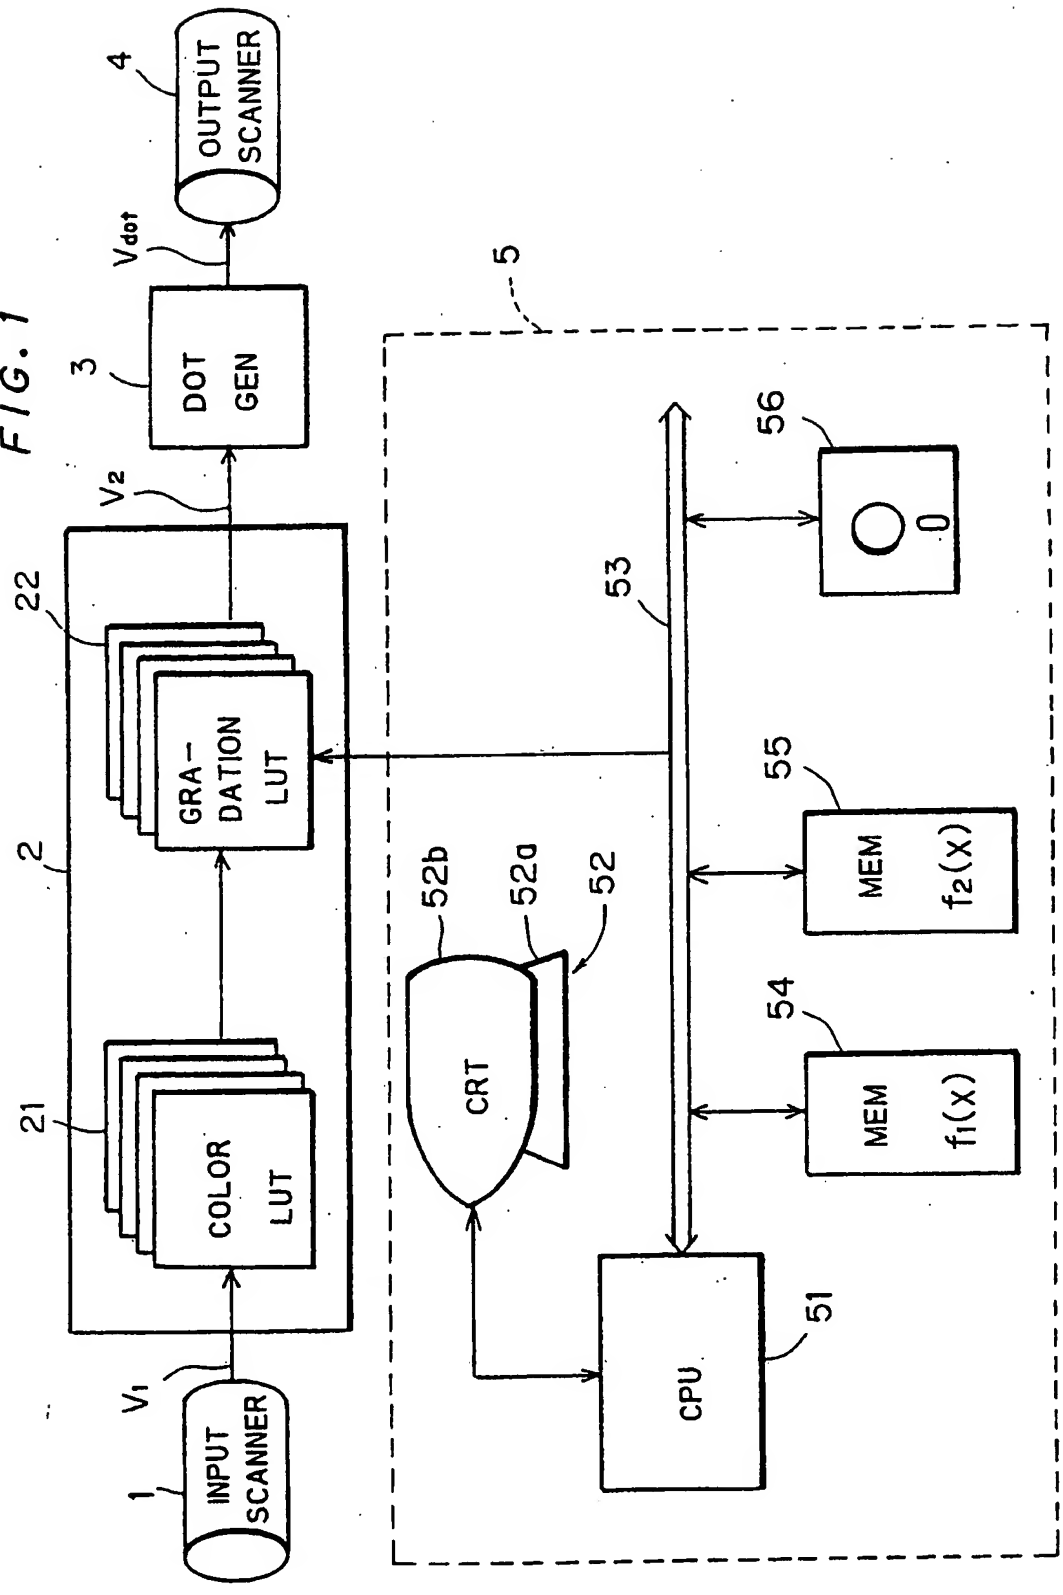
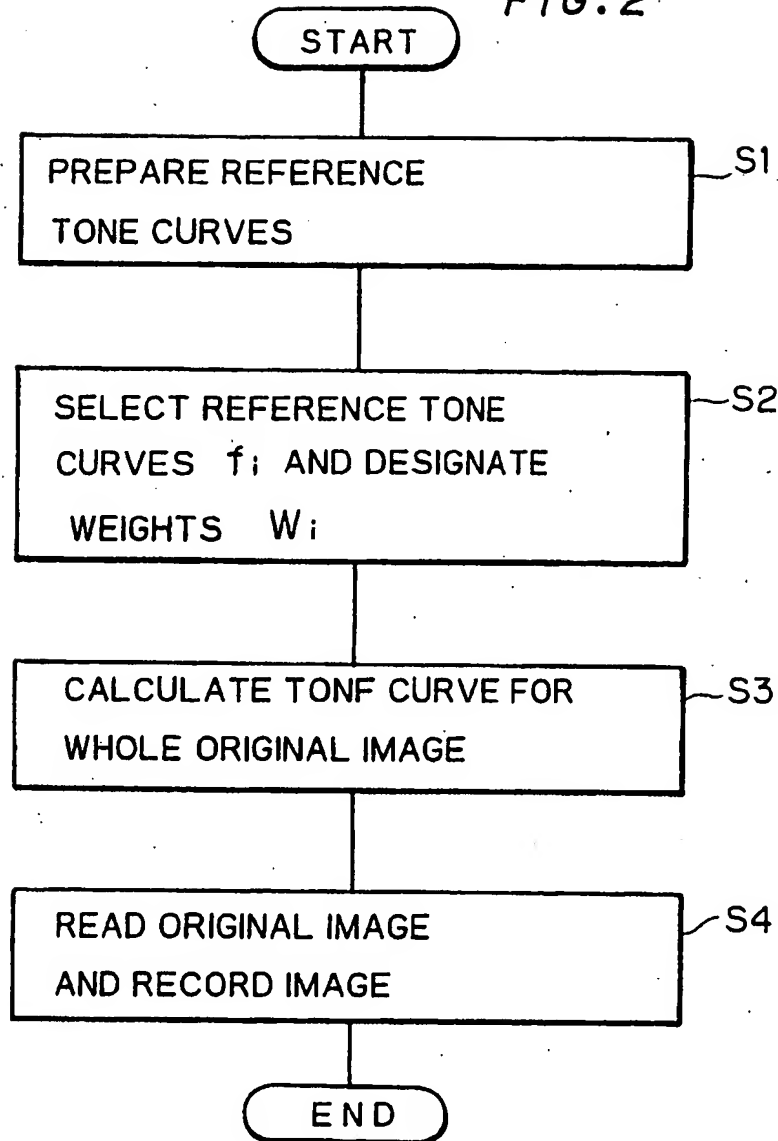


FIG. 2



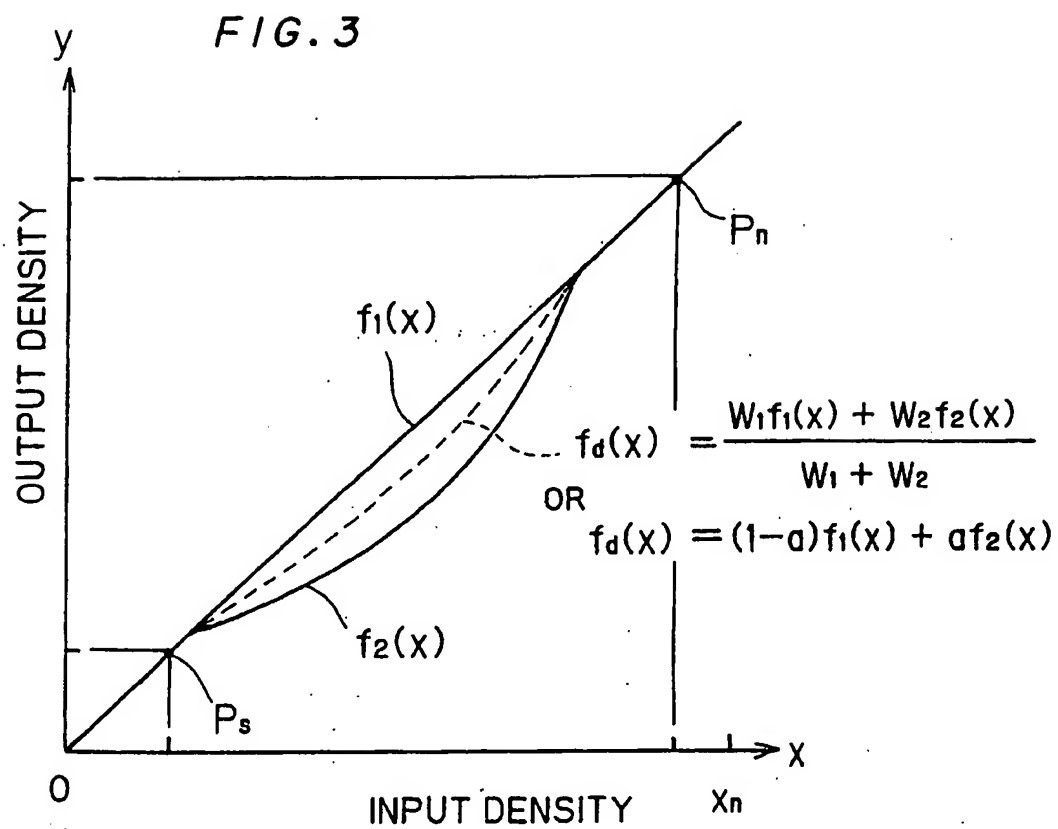


FIG. 5

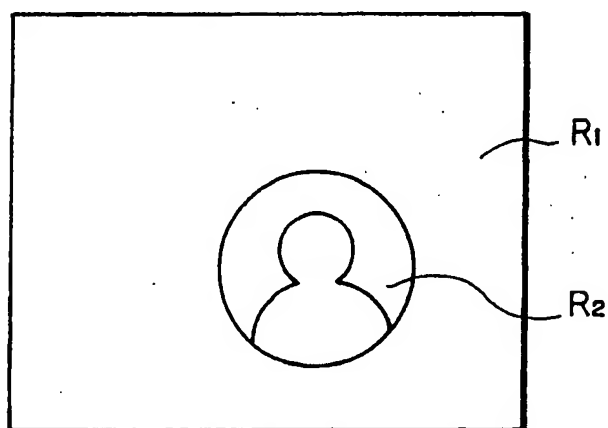


FIG. 4

MT

<div> <div>PORTRAIT (HIGH KEY)</div> <div>PORTRAIT (STANDARD)</div> <div>PORTRAIT (LOW KEY)</div> </div>	<div> <div>---</div> <div>---</div> <div>---</div> </div>
<div> <div>MACHINE (HIGH KEY)</div> <div>MACHINE (STANDARD)</div> <div>MACHINE (LOW KEY)</div> </div>	<div> <div>---</div> <div>---</div> <div>---</div> </div>
<div> <div>LANDSCAPE (HIGH KEY)</div> <div>LANDSCAPE (STANDARD)</div> <div>LANDSCAPE (LOW KEY)</div> </div>	<div> <div>---</div> <div>---</div> <div>---</div> </div>

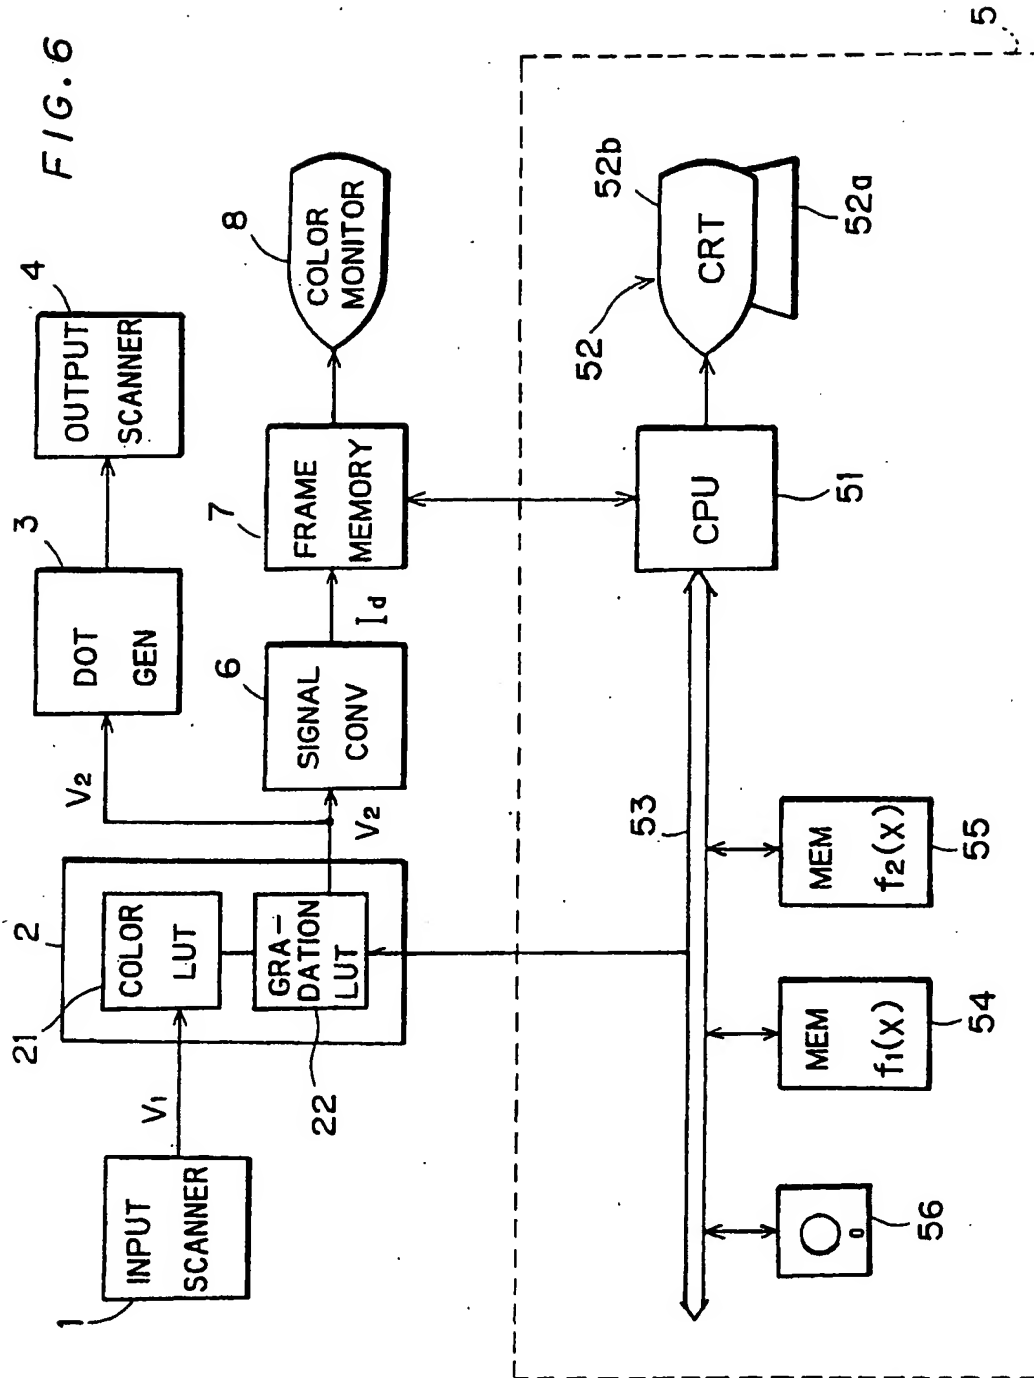


FIG. 7


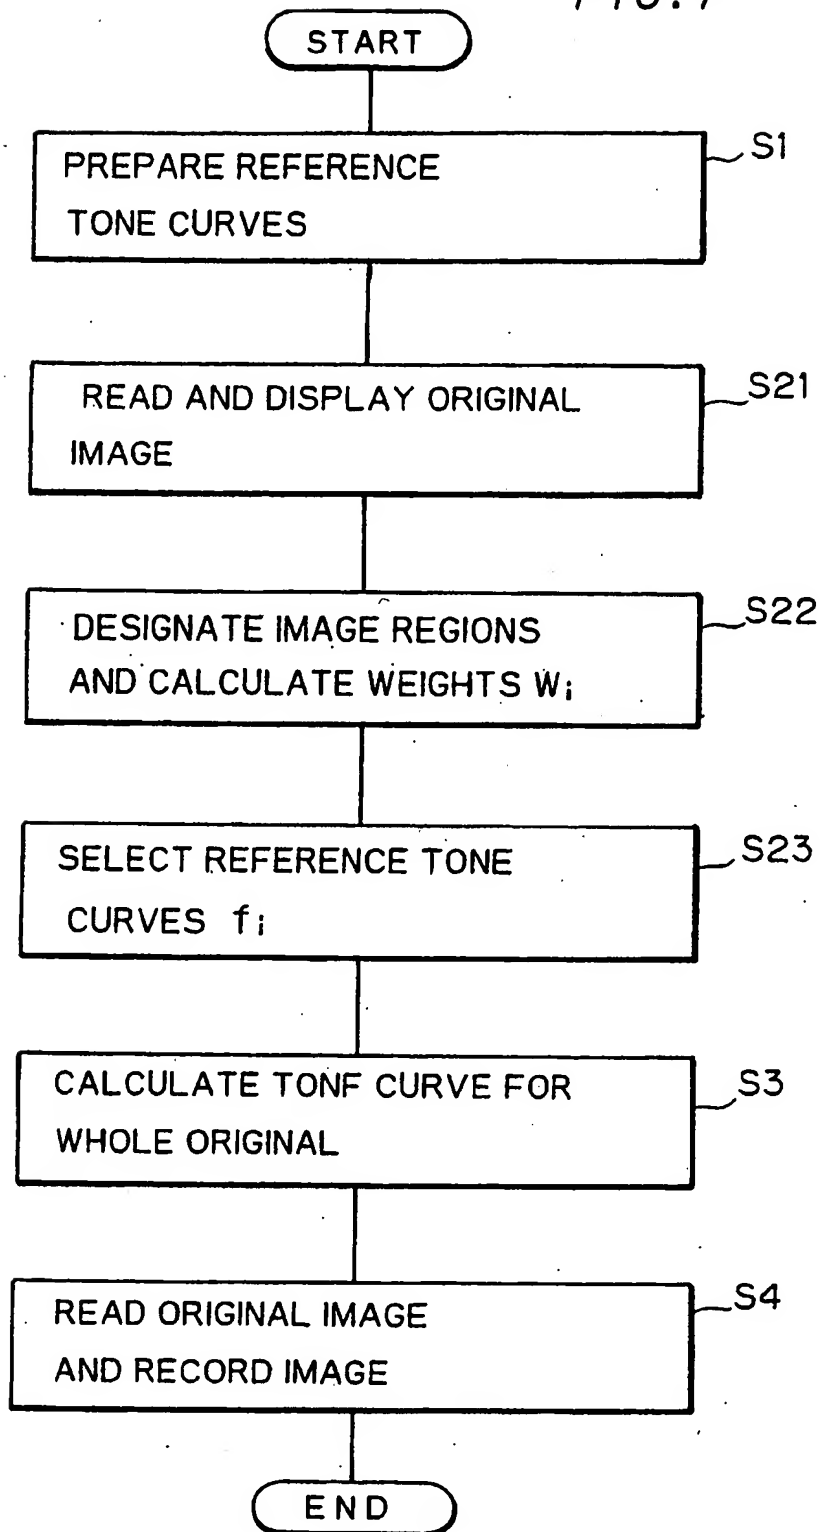


FIG. 8



THIS PAGE BLANK (USPTO)

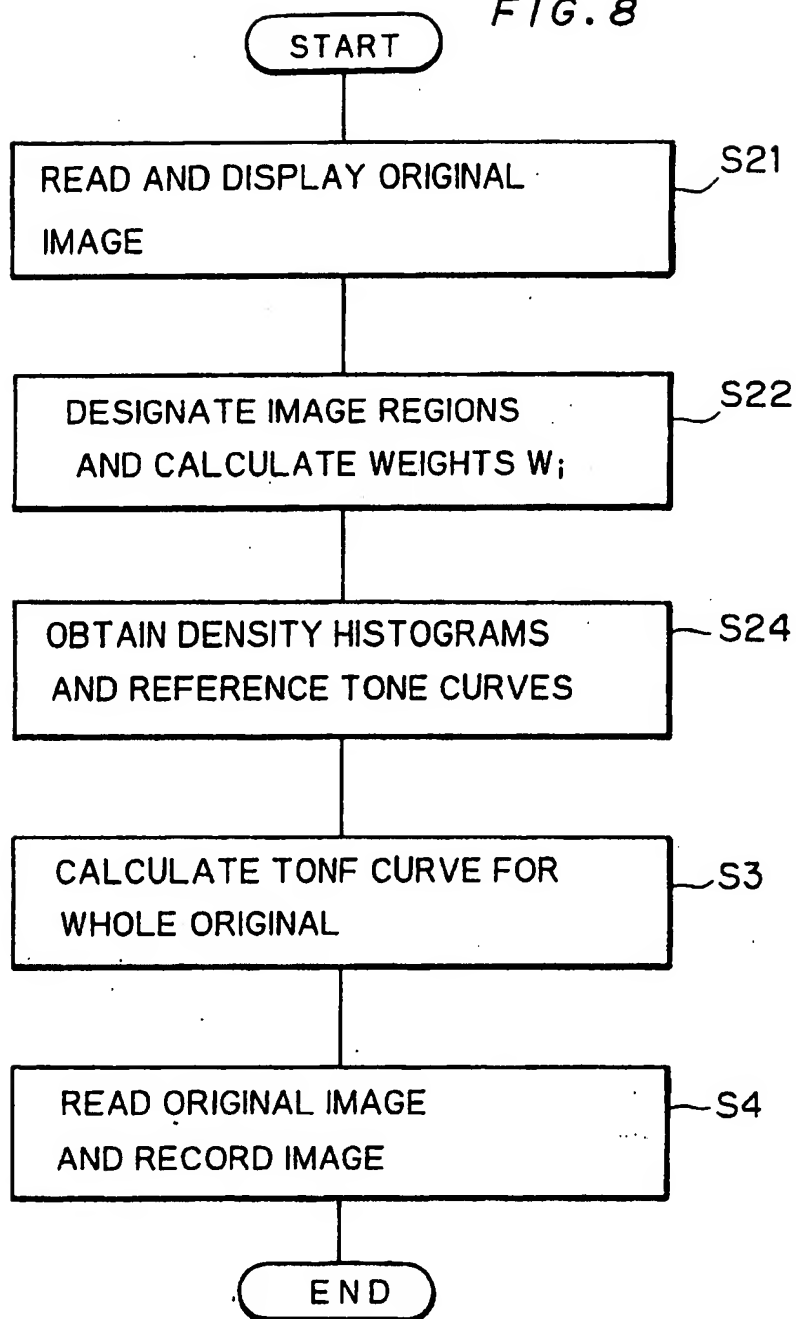

Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number:

0 424 920 A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 90120425.5

(51) Int. Cl.⁵: H04N 1/40

(22) Date of filing: 24.10.90

(30) Priority: 25.10.89 JP 277396/89

(43) Date of publication of application:
02.05.91 Bulletin 91/18

(84) Designated Contracting States:
DE FR GB

(86) Date of deferred publication of the search report:
08.04.92 Bulletin 92/15

(71) Applicant: Dainippon Screen Mfg. Co., Ltd.
1-1, Tenjinkitamachi Teranouchi-Agaru
4-chome Horikawa-Dori
Kamikyo-ku Kyoto 602(JP)


(72) Inventor: Kishida, Yoshihiro, Dainippon
Screen Mfg. Co. Ltd.
1-1, Tenjinkitamachi, Teranouchi-Agaru
4-chome
Horikawa Dori, Kamikyo-ku, Kyoto(JP)

(74) Representative: Goddar, Heinz J., Dr. et al
FORRESTER & BOEHMERT
Franz-Joseph-Strasse 38
W-8000 München 40(DE)

(54) Method of and apparatus for obtaining tone curve.

(57) A plurality of reference tone curves are previously determined. An operator divides an original image into image regions and selects respective reference tone curves ($f_1(x)$, $f_2(x)$) for the image regions. The operator designates weight values

(w_1, w_2) for the respective reference tone curves. A weighted average of the respective reference tone values is calculated with the weight values to obtain a tone curve ($f_d(x)$) employed for converting the gradation of the original image.

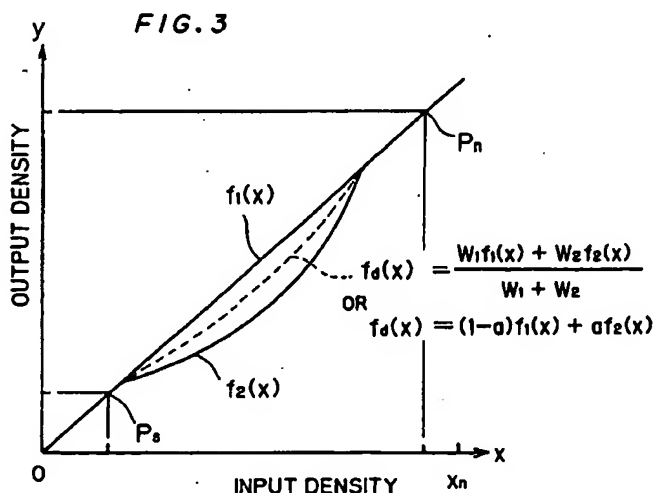



European
Patent Office

EUROPEAN SEARCH REPORT

Application Number

EP 90 12 0425

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A,D	EP-A-0 255 949 (DAINIPPON SCREEN MFG CO LTD) * abstract; claim 1; figures 1-2 ** -----	1-25	H 04 N 1/40
A	GB-A-2 207 023 (SEIKOSHA CO LTD) * page 4, line 8 - page 6, line 8 * * abstract; figure 1 ** -----	1,10,18, 22	
A	GB-A-2 182 821 (FUJI PHOTO FILM CO LTD) * page 2, line 50 - line 97 * * page 2, line 117 - page 3, line 45 * * abstract; figures ** -----	2-3	
A	EP-A-0 322 879 (DAINIPPON SCREEN MFG CO LTD) * column 3, line 51 - column 4, line 46 ** -----	4-6,13-14	
A	WO-A-8 810 043 (EASTMAN KODAK COMPANY) * page 6, line 32 - page 7, line 7 * * abstract; claim 1; figure 3 ** -----	1,18	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			H 04 N G 06 F
The present search report has been drawn up for all claims			
Place of search		Date of completion of search	Examiner
The Hague		24 January 92	ISA S.
CATEGORY OF CITED DOCUMENTS			
X: particularly relevant if taken alone			
Y: particularly relevant if combined with another document of the same category			
A: technological background			
O: non-written disclosure			
P: intermediate document			
T: theory or principle underlying the invention			
E: earlier patent document, but published on, or after the filing date			
D: document cited in the application			
L: document cited for other reasons			
&: member of the same patent family, corresponding document			